

Type 1100

Sensor Type	Calibration	OD	Junction	Sheath Length	Sheath Material	Termination	Options
1100				(inches)			

SENSOR

Sensor Calibration

- J Iron Constantan®
- K Chromel® Alumel®
- T Copper Constantan®
- E Chromel® Constantan®
- N Nicrosil® Nisil®
- R Platinum 13% Rhodium
Pure Platinum
- S Platinum 10% Rhodium
Pure Platinum

Sensor OD

- 125 1/25"
- 116 1/16"
- 18 1/8"
- 316 3/16"
- 14 1/4"
- 516 5/16"
- 38 3/8"


Sensor Junction

- G Grounded
- U Ungrounded
- E Exposed
- DG Dual Grounded
- DU Dual Ungrounded
- DE Dual Exposed

Sensor Sheath Material

- P 304SS
- R 316SS
- Q 310SS
- A Alloy 600

Standard Sheath Material is 316SS.
Other sheaths available.

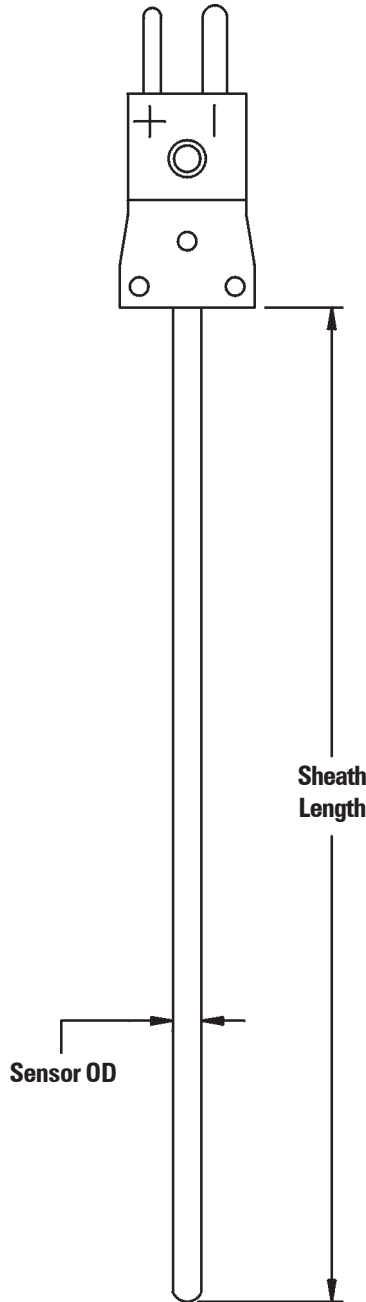

Termination Code

1	Bare Ends - 1" <i>For longer leads, see Type 1200</i>	
2	Large Plug	
3	Miniature Plug	
4	Hi Temp Large Plug	
5	Large Jack	
6	Miniature Jack	
7	Hi Temp Large Jack	
8	Dual Large Plug*	
9	Dual Large Jack*	
10	Terminal Head	
11	Compensated Spade Lugs	
12	Three Prong Plug	
13	Three Prong Jack	

* Two single connectors are bracketed for MI cable termination.

OPTIONS

- BA Bayonet Adapter (Adjustable)
- BF Bayonet Cap & Spring, (1/8" and 3/16" OD only)
Note inches from cap to tip (fixed)
- BD45 45° Bend in Sheath (note inches from bend to tip)
- BD90 90° Bend in Sheath (note inches from bend to tip)
- BR18 Adj Brass Comp Fitting 1/8" NPT*
- BR14 Adj Brass Comp Fitting 1/4" NPT*

- BR12 Adj Brass Comp Fitting 1/2" NPT*
- LB Connector "L" Bracket
- SS18 Adj SS Comp Fitting 1/8" NPT*
- SS14 Adj SS Comp Fitting 1/4" NPT*
- SS12 Adj SS Comp Fitting 1/2" NPT*
- TF Teflon® Coated Sheath
- VH Vent Hole in Compression Fitting

*Add T after SS or BR for Teflon® Ferrule

See page B-6 for complete option descriptions.